



MICORUS

HOTEL ROOM LANDLINE TELEPHONE

MC-APH-P403BE/B




HOTEL ROOM LANDLINE TELEPHONE

MC-APH-P403BE/B

DESCRIPTION

MC-APH-R403BE/B is a premium corded analogue landline telephone specifically designed for high-end hotel guest rooms. This compact device features a custom logo design and is constructed from a durable ABS plastic case with surface-mounted technology and CPU control for consistent performance. It operates as a common-key phone using standard DTMF dialing and is built to function reliably within a voltage range of 24V to 60V DC. The telephone is engineered to withstand various environmental conditions, remaining operational in temperatures from -10°C to +40°C. Furthermore, its lightweight and streamlined design makes it a practical yet elegant communication tool for modern hospitality settings.

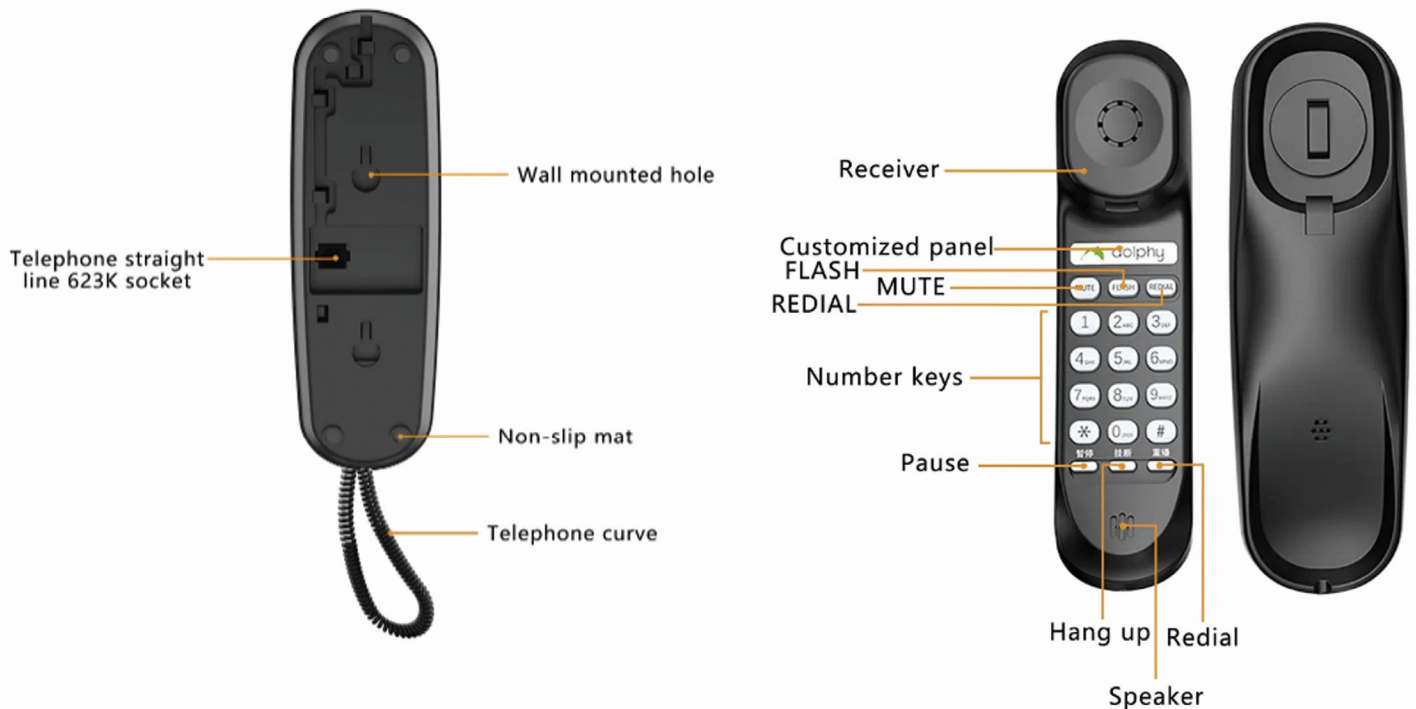



HOTEL ROOM LANDLINE TELEPHONE

MC-APH-P403BE/B


FEATURES



- Custom Logo Design: Offers a premium aesthetic with the ability to include a custom logo, tailored for hotel branding.



- Triple-Proof Protection: Specially engineered to be waterproof, moistureproof, and fireproof for maximum durability and safety.



- Flexible Technical Compatibility: Supports adjustable flash time settings (100ms, 300ms, or 600ms) to ensure compatibility with different PBX systems.



- Message Waiting Light: Features a standard 90~150V DC message waiting light voltage to keep guests informed of new notifications.



- Certified Quality: Meets international standards with certifications including FCC, CE, ISO9001, and IEC, ensuring high reliability and performance.



TECHNICAL SPECIFICATIONS

GENERAL INFORMATION



The MC-APH-P403BE/B hotel phone offers reliable communication with common key function in a robust, classic design.

MOEL**MODEL:** MC-APH-P403BE/B**TYPE:** Hotel Telephone**APPLICATION:** Hotel Room

POWER & PERFORMANCE

**Function:**
Common Key PhoneDial:
DTMF**Flash Time:** 100ms, 300ms,
600ms optional; standard 600ms.
Operating Voltage: 24V~60V DC**Operating Temperature:**
-10°C ± 40°C**Message Waiting Light Voltage:**
Standard 90~150V DC

INSTALLATION & BUILD

**Material:**
ABS plastic case; surface mounted
technology with CPU control**Feature:**
Waterproof / Moistureproof / Fireproof**Handset:**
Multi-step volume control
with clear sound**Style:**
Classic**Colour:**
Beige /
Black**Certificates:**
FCC, CE, CIA, ISO9001,
ISO9002, SASO, IEC

PHYSICAL DETAILS & LOGISTICS

**Net Weight / PC:** 0.365 kg
Package Size:
22.00 cm x 6.50 cm x 9.00 cm**Package Gross Weight:** 0.365 kg
Packing Quantity: 40 sets/Carton
Transport Package: 15.6 kg
Carton Size 46.0 x 37.0 x 40.0 cm